



HAS 9 E

according to EN 341:2011/1C, EN 360:2002



IKV 21 (EN 362:2004)
with fall indicator

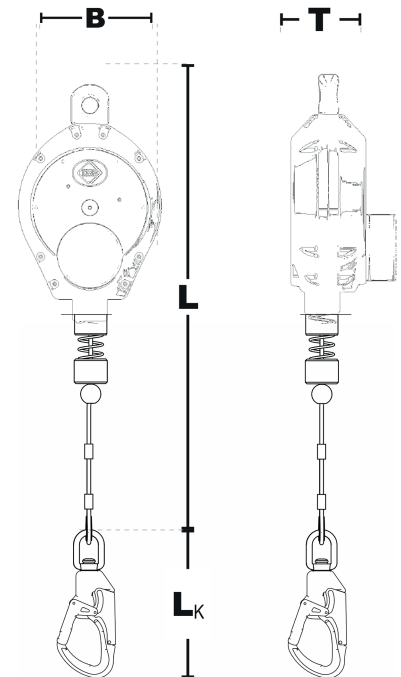

Product information:

Order No.:	Application length	Housing	Weight	Dimensions (LxBxT)	Carabiner hook (L _K)
42-HAS 9 E	9 m	Aluminum	5,0 kg	455 x 160 x 120 mm	186 mm

Features:

Descender with Freewheel on the Rope Draw-in

- Resistant and low-maintenance descent rescue device
- Robust, seawater-resistant aluminum housing with retractable connector stainless steel cable Ø 4.8 mm
- Standard Connection element IKV 21 . Other connection elements on demand.
- During normal use, the user can move freely within the working area without having to work against a brake resistance. In case of a fall, the user is safely descended at a controlled speed.
- Proofed for 1 person
- Nominal load: 50 - 136 kg
- Proof load: EN 341: 170 kg
- max. descent speed: 0,5 m/s
- Temperature range of application: -40°C bis +50°C
- Lifespan: approx 10 years

Application:

Rescue, descent

Areas of use:

Fall arrest, escape rescue