



HAS 30

according to EN 341:2011/1C, EN 360:2002



IKV 21 (EN 362:2004)
with fall indicator

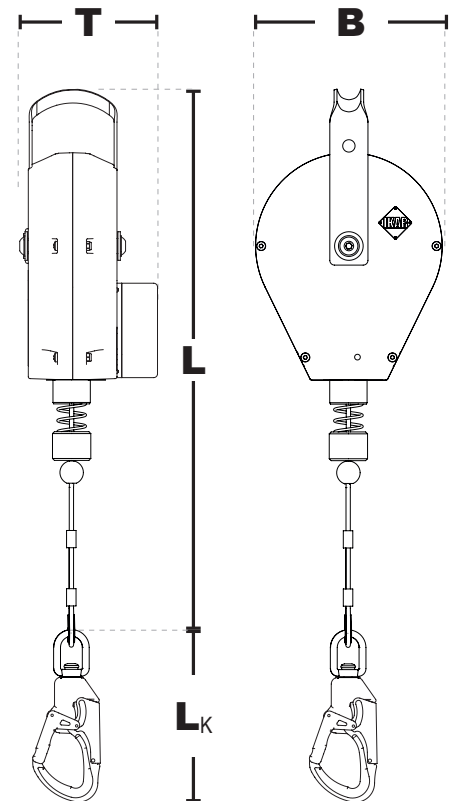

Product information:

| Order No.: | Application length | Housing | Weight | Dimensions (LxBxT) | Carabiner hook (L _K) |
|------------|--------------------|-----------|---------|--------------------|----------------------------------|
| 42-HAS 30 | 30 m | Aluminium | 17,0 kg | 610 x 280 x 140 mm | 186 mm |

Features:

Descender with Freewheel on the Rope Draw-in

- Resistant and low-maintenance descent rescue device
- Robust, seawater-resistant aluminium housing with retractable connecting means galvanized steel cable Ø 4.8 mm
- Standard connector IKV 21
- During normal use, the user can move freely within the working area without having to work against a brake resistance. In case of a fall, the user is safely descended at a controlled speed.
- Tested for 1 person
- Nominal load: 50 - 136 kg
- Proof load: EN 341: 170 kg
- max. descent speed: 0,5 m/s
- Temperature range of application: -40°C bis +50°C
- Lifespan: approx 10 years

Application:

Rescue, descent

Areas of use:

Fall arrest, escape rescue