


Webbing Anchorage Sling and Lanyard

according to EN 795:2012 Typ B, EN 354:2010

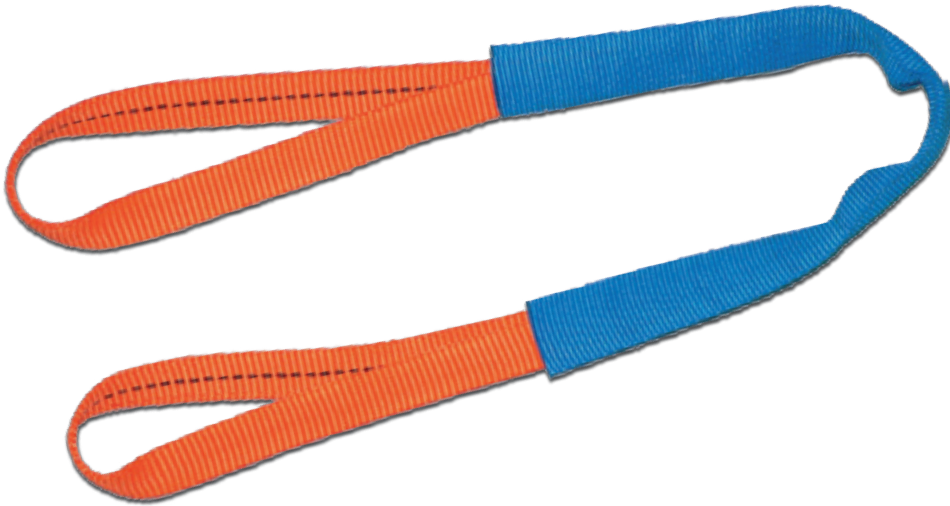

Order No.:	Length	Weight
45-IK AB 50	0,5 m	100 g
45-IK AB 100	1,0 m	200 g
45-IK AB 150	1,5 m	300 g
45-IK AB 200	2,0 m	400 g

Features:

Band sling as a transportable anchorage element and part of a collection system of the PSaG A

- Webbing anchorage sling 27 mm, made of polyester (orange)
- Hose strap 45 mm, made of polyester (blau)
- Robust webbing protection
- transportable anchorage
- part of a collection system of the PSaG A

Application:

Anchorage device for use in fall restraint and fall arrest systems

Areas of use:

Industrial, construction and utility environments