
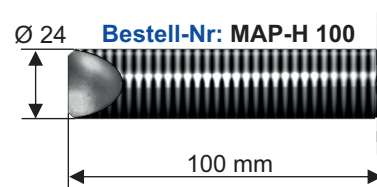
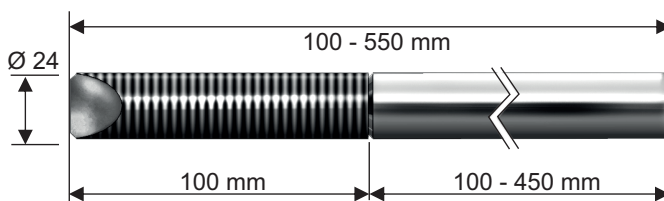
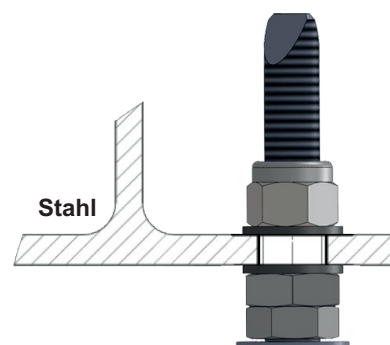


MAP temporary, pivotable Eyebolt

according EN 795:2012 Typ B, CEN/TS 16415:2013

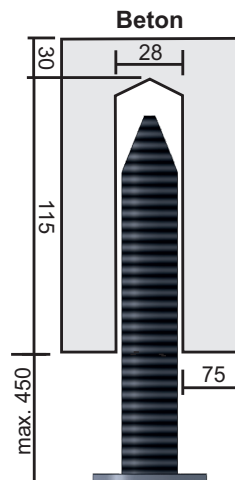

Drawings not true to scale

Order No.:	Sleeve length	in Cement with injection adhesive	for bolting to steel constructions	Weight
MAP	-	-	-	kg
MAP-SH 150	150 mm		☒	1,0 kg
MAP-H 100	100 mm	☒		1,0 kg
MAP-H 150	150 mm	☒		1,0 kg
MAP-H 200	200 mm	☒		1,1 kg
MAP-H 250	250 mm	☒		1,2 kg
MAP-H 300	300 mm	☒		1,4 kg
MAP-H 350	350 mm	☒		1,6 kg
MAP-H 400	400 mm	☒		1,8 kg
MAP-H 450	450 mm	☒		2,0 kg
MAP-H 500	500 mm	☒		2,1 kg
MAP-H 550	550 mm	☒		2,3 kg

Features:

Mobile anchor to secure 2 persons

- Eyebolt which is removable at the press of a button, with Ø 24 mm sleeve for anchoring
- in Cement with injection adhesive (MAP-H 100 bis MAP-H 550)
- for bolting to steel constructions (MAP-SH 150)
- Components are made of stainless steel
- Metric sleeve thread M24 external